



2020+ Polaris RZR Pro XP
Pull Plate # S3167



INSTALLATION INSTRUCTIONS
RZR Pro XP
Pull Plate



2020+ Polaris RZR Pro XP

Pull Plate # S3167

PARTS LIST

ITEM	PART #	DESCRIPTION	QTY
	S3167	Rear Pull Plate	1

- 1.) Place RZR in park (P) on a flat level surface, elevate and support on suitable jack stands. Remove rear tires.
- 2.) Remove 6 Torx 40 bolts on rear fascia. Set safely aside. See Picture A.
- 3.) Remove 4 bolts, washers, and nuts from the OEM radius rod plate using 18mm socket and wrench. Retain factory hardware. (*Pro Tip : Use an open end wrench to hold backup, gaining access from behind the transmission.*)
- 4.) Carefully remove OEM radius rod plate and let OEM radius rods hang from the bearing carriers.
- 5.) Install S3 Pull Plate, using factory hardware. Hand tighten hardware first. Once all bolts are hand tight, tighten to factory spec. in a crisscross pattern. (*Pro Tip : Have an assistant manipulate the hub assembly parallel to the radius rods to aid with lining up Pull Plate bolt holes.*) (*Pro Tip : Red threadlocker recommended.*)
- 6.) Trim rear fascia, using appropriate cutting tool. See Picture B and C. (*Pro Tip : Dremel or equivalent works well.*)
- 7.) Reinstall rear fascia, reusing 6 Torx 40 bolts.
- 8.) Reinstall wheels/tires to factory spec and place RZR on ground. Test drive and recheck all hardware.

Thank you for choosing S3 Power Sports! Let us know if you have any questions! 855-221-7097.



2020+ Polaris RZR Pro XP

Pull Plate # S3167

Picture A






2020+ Polaris RZR Pro XP

Pull Plate # S3167

Picture B

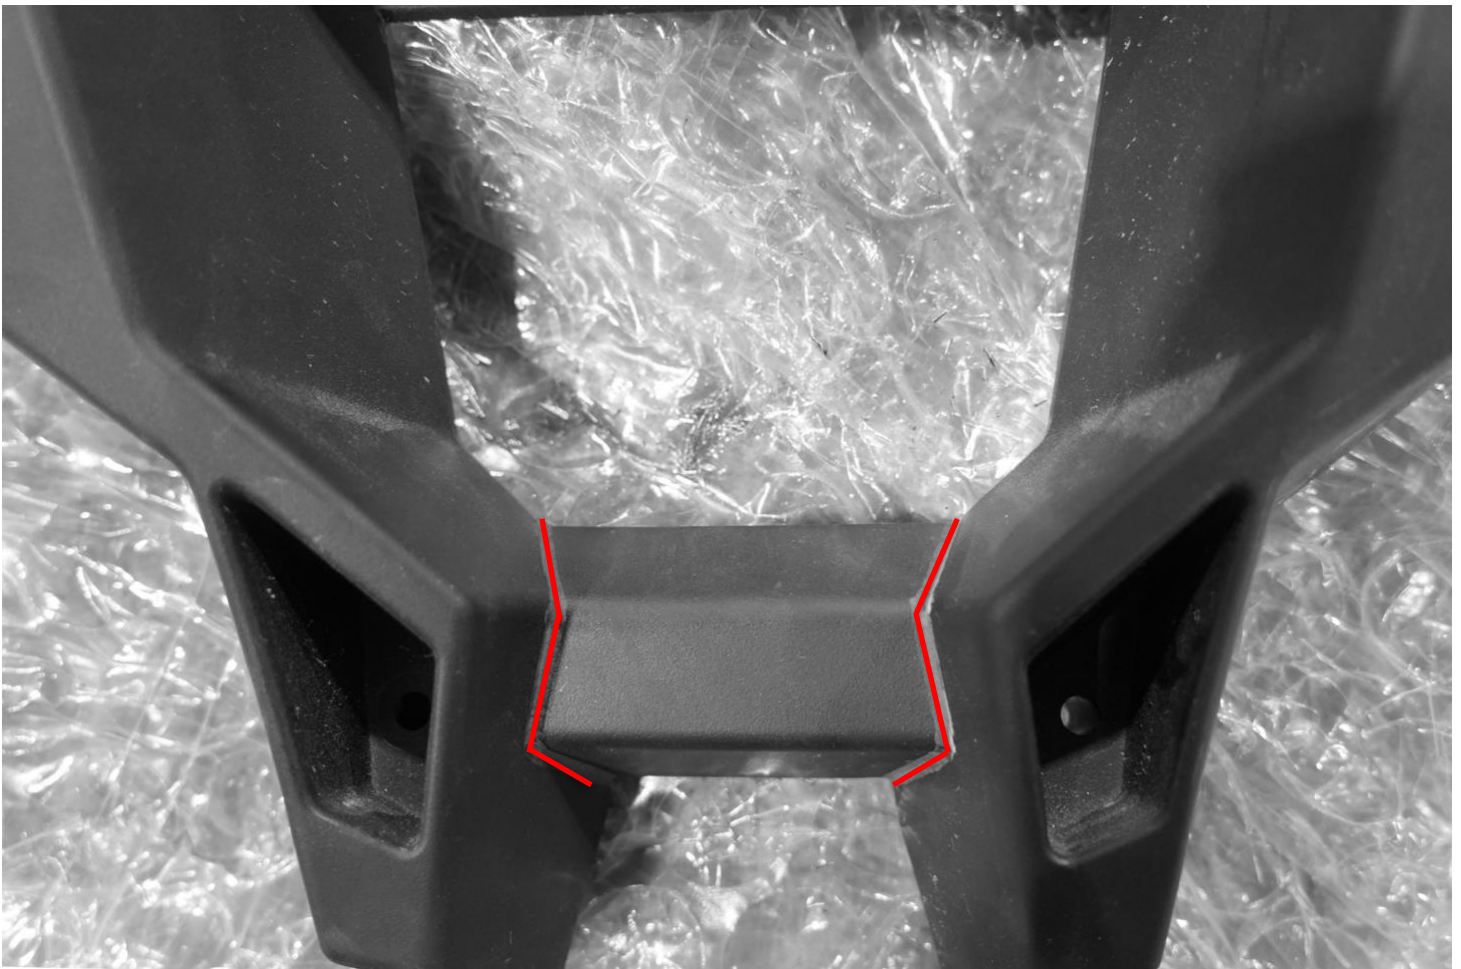



2020+ Polaris RZR Pro XP

Pull Plate # S3167

Picture C

